


LiftMaster 888LM Control Panel

Need help? Give us a call.
1-877-826-5443

Setup & Mount

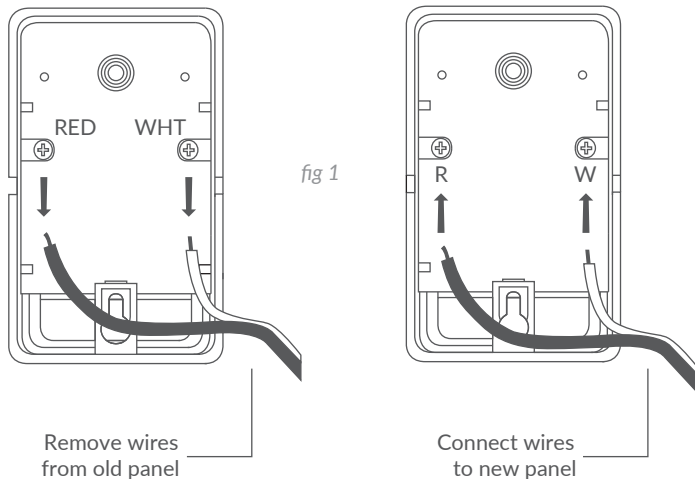

STEP 1

Disconnect all electrical and battery power (if applicable) to garage door opener. Remove existing door control from the wall. Note the polarity of the wires connected to the existing door control (fig 1).

STEP 2

Label the wire connected to the RED terminal. Label the wire connected to the WHITE terminal. Disconnect wires from the existing door control. Connect wires to new MEQ Control. Red wire to the R Terminal. White wire to the W terminal.

STEP 3

Mount MyQ Control Panel to the wall. Reconnect power. Yellow command LED and red learn LED will blink quickly for up to 5 minutes as control panel recharges. When control Panel is operational, yellow command LED will glow steadily.

STEP 4

To test control panel, press push bar to activate garage door opener.