

TS1 2GIG Auxiliary Touchscreen

Need help? Give us a call.
1-877-826-5443

Setup

Note: Skip setup steps 1-3 if this isn't your first TS1.

STEP 1

Power down Go!Control panel (unplug transformer and disconnect battery). With panel back plate off, remove existing transceiver (silver rectangular module with black pad on top) by lifting the module straight up.

STEP 2

Carefully install the XCVR-345 transceiver included with TS1 (silver rectangular module with an orange antenna). Ensure all pins are connected.


Note: If module isn't seated correctly, you will see "loss of sensor supervision" alert on panel upon power up. To resolve, power panel down and correct position of module.

STEP 3

Reconnect and plug TS1 transformer back into non-GFI AC outlet near Go! Control panel for ease of programming.


Note: You can move TS1 to permanent location after programming.

Mount

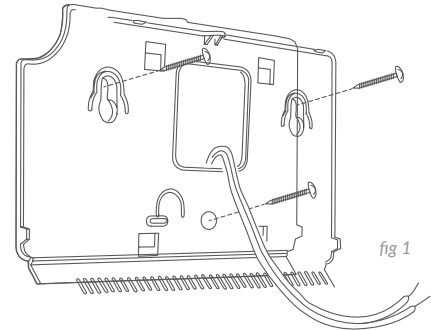

STEP 1

Use the three screws and anchors supplied to attach mounting plate to permanent wall location (fig 1).



STEP 2

Plug in power supply to outlet, and use one of the provided brackets to secure power supply (fig 2).